


↓ VIEWING DIR. (视向) 12:00

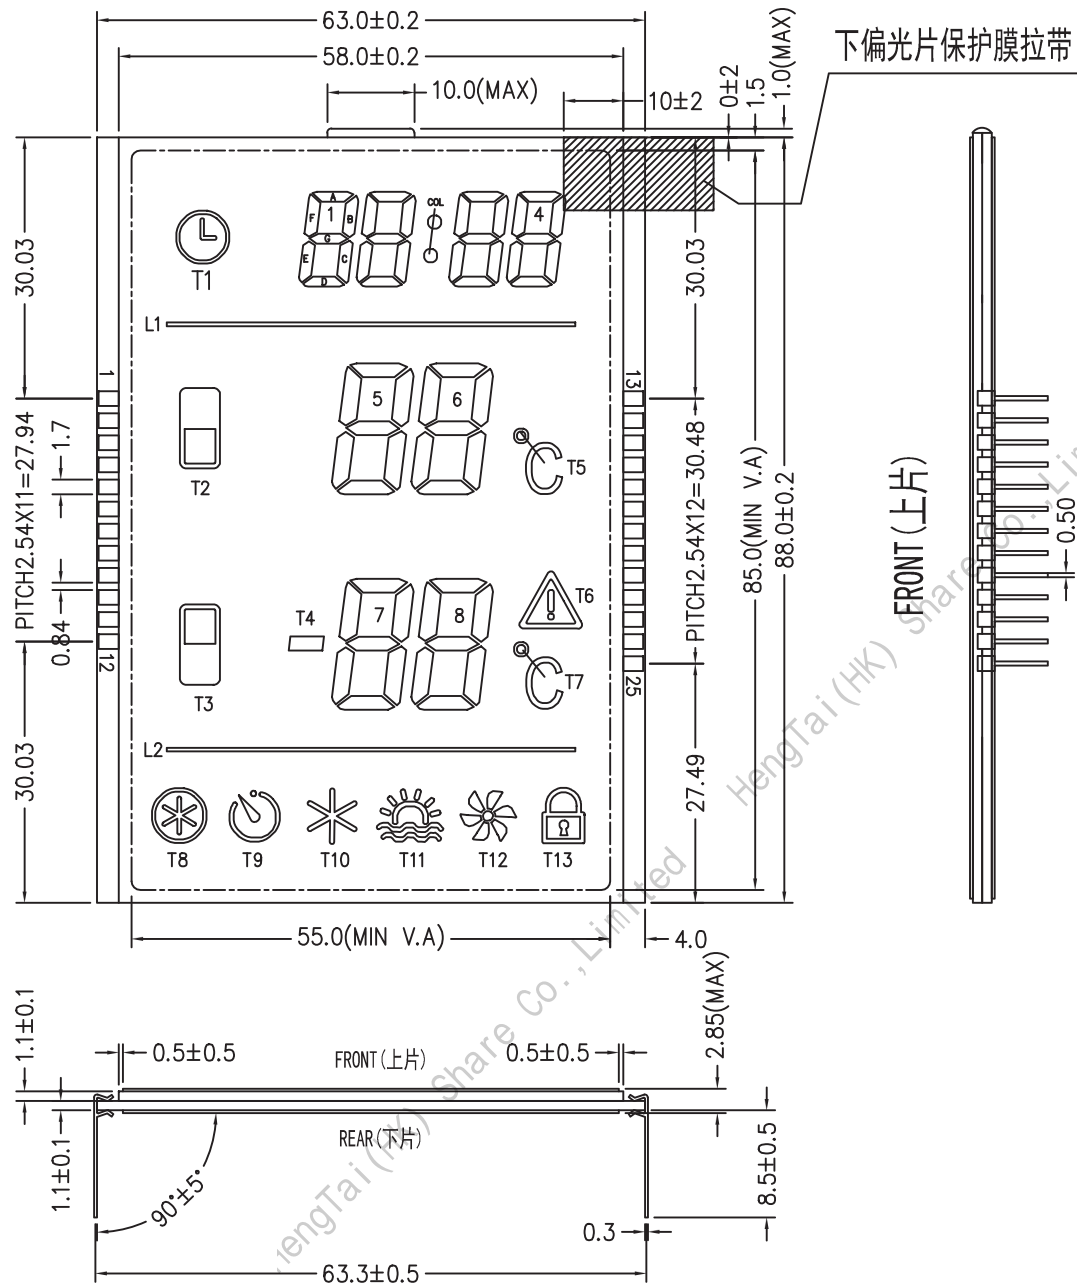

PIN	COM1	COM2	COM3	COM4
1	COM1			
2		COM2		
3			COM3	
4				COM4
5	IF	IG	IE	T1
6	1A	1B	1C	1D
7	6D	6C	6B	6A
8	T5	6E	6C	6F
9	5D	5C	5B	5A
10	T2	5E	5G	5F
11		T6	T7	L2
12			T8	T9
13	2F	2G	2E	L1
14	2A	2B	2C	2D
15	3F	3G	3E	COL
16	3A	3B	3C	3D
17	4F	4G	4E	
18	4A	4B	4C	4D
19	7F	7G	7E	T4
20	7A	7B	7C	7D
21	8F	8G	8E	T3
22	8A	8B	8C	8D
23	T13	T12	T11	T10
24				
25				

NOTE:

1. DISPLAY TYPE: TN-POSITIVE-TRANSMISSIVE, 高清液晶
2. VIEWING DIR.: 12:00
3. DRIVE METHOD: 1/4DUTY 1/3BIAS, Vop5.0V
4. OP. TEMP.: -20°C~70°C
5. ST. TEMP.: -30°C~80°C
6. MATERIAL AND PACKAGING COMPLY RoHS

## HengTai(HK) Share Co., Limited

DRAWING NO. 圖號	TG2018		OTHER TOLERANCE 未标注公差 ±0.2/±5°		
DRAW 設計	DATE 日期	2012.12.12			
CHECK 審核	DATE 日期	UNIT 單位	mm(inch)	PAGE 頁碼	1/3
APPR 批准	DATE 日期	MEMO 備註		VER 版本	1